




Product: [RKP 4-803](#)

Mini Power Single-Ended Cordset: 1 3/8", female, straight, 4-pin(3+PE), black body, 600 V, 40 A; TPE black cable, 10 AWG

Product Description

Mini Power Single-Ended Cordset: 1 3/8", female, straight, 4-pin(3+PE), black body, 600 V, 40 A; TPE black cable, 10 AWG

Technical Drawing

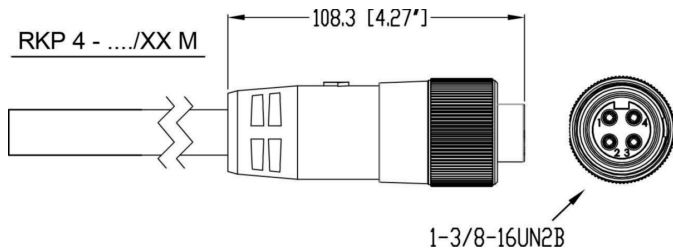

Technical Specifications

Technical Data

Product Family:	Power Connector
Product Sub Family:	1 3/8"
Brand:	Lumberg Automation
Connector Type:	Cordset, single ended
Type of Contact / Gender:	female
Connector Design:	straight
Number of Pins:	4(3+PE)
Shielding:	Unshielded
Attachment Type:	Coupling Nut
Rated Voltage (UL):	600 V
Rated Current (UL)*:	40 A
Ambient Temperature (Operation)*:	-30 °C to +90 °C
Protection Degree / IP Rating**:	IP 67, IP 68

Materials

Contact Base Material:	CuSn
Contact Plating:	Ni/Au
Contact Bearer Material:	PVC
Contact Bearer Color:	black
Molded Body Material:	PVC
Molded Body Color:	black
Attachment Material:	CuZn

Cable Data

Cable Number:	803
Conductor Size:	10 AWG
Number of Wires:	4

Cable Jacket Material:	TPE
Cable Jacket Color:	black
Cable Diameter D:	ø 0.519"
Wire Insulation Material:	PVC/NYLON
Ambient Temperature (Fixed Installation):	-30 °C to +90 °
Flammability Class (Cable Jacket):	FT-4

Approvals

UL-File:	E482233
UL:	TC-ER

Safety & Environmental Compliance

RoHS Compliant:	Yes
-----------------	-----

Resistances

Oil Resistance:	Oil Res I/II
UV Resistance:	Sunlight Res

Notes

Protection Degree / IP Rating Note:	** only if mounted and locked in combination with Hirschmann / Lumberg Automation connector.
-------------------------------------	--

Variants

Item #	Item Description	Cable Length
511000142	RKP 4-803/0.5M	0.5 m
511000143	RKP 4-803/1M	1 m
511000145	RKP 4-803/2M	2 m
511000147	RKP 4-803/3M	3 m
511000148	RKP 4-803/4M	4 m
511000149	RKP 4-803/5M	5 m
511000150	RKP 4-803/6M	6 m
511000151	RKP 4-803/8M	8 m
511000152	RKP 4-803/10M	10 m
511000153	RKP 4-803/12M	12 m
511000154	RKP 4-803/14M	14 m
511000155	RKP 4-803/15M	15 m
511000156	RKP 4-803/18M	18 m
511000157	RKP 4-803/20M	20 m
511000158	RKP 4-803/22M	22 m
511000159	RKP 4-803/25M	25 m
511000160	RKP 4-803/30M	30 m
511000161	RKP 4-803/35M	35 m
511000162	RKP 4-803/40M	40 m
511000163	RKP 4-803/45M	45 m
511000164	RKP 4-803/50M	50 m
511000144	RKP 4-803/1.5M	1.5 m
511000146	RKP 4-803/2.5M	2.5 m